


HZDR-SS



HZDR-SS



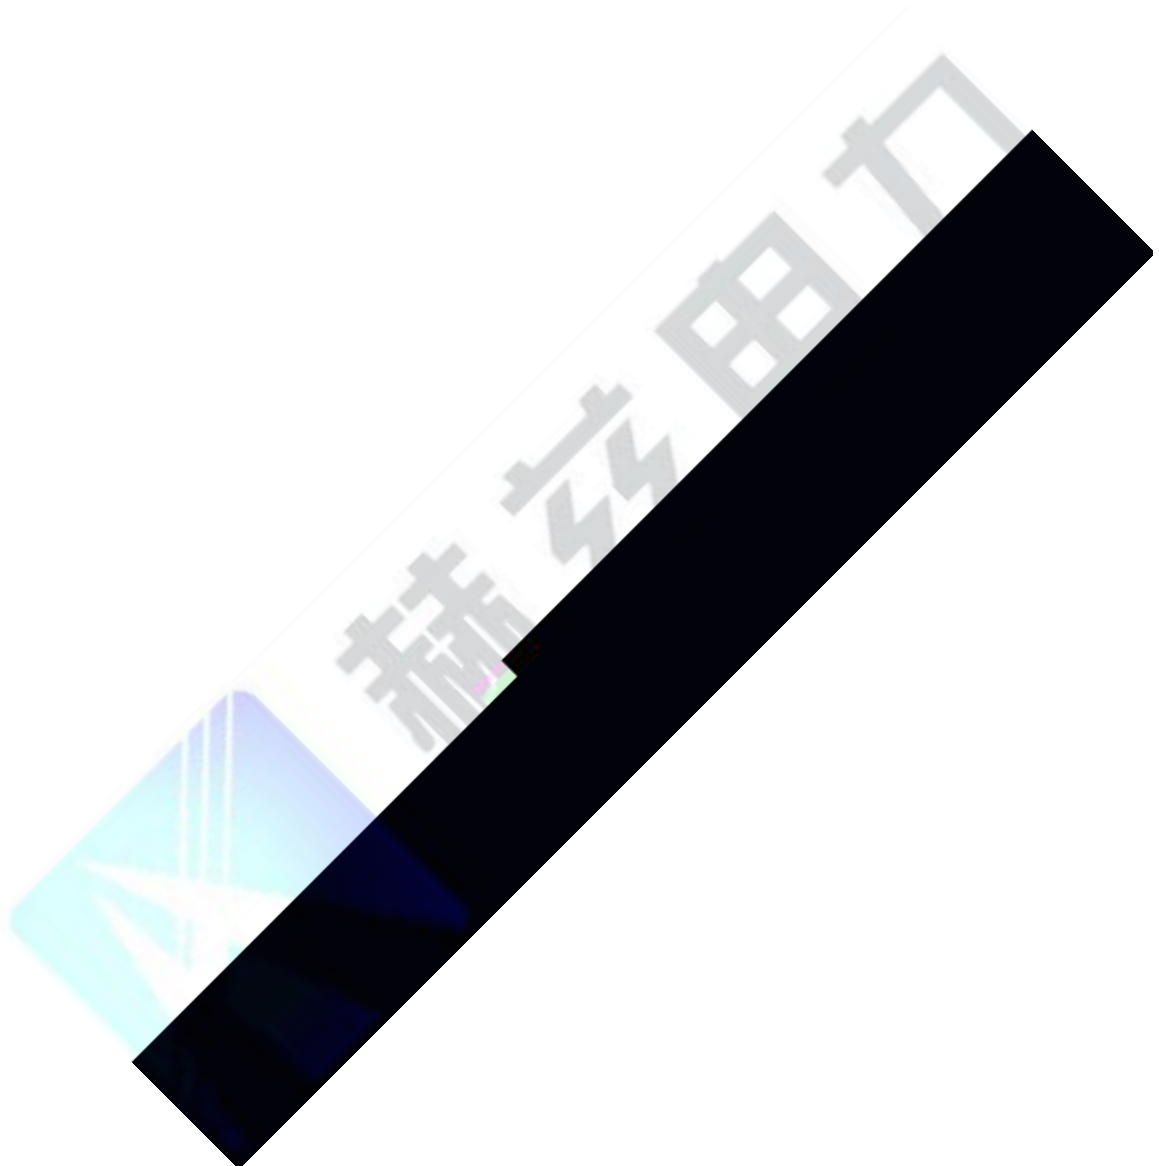


"

"

GB3983. 2- 1989

DL/T840- 2003

JB5346- 1998

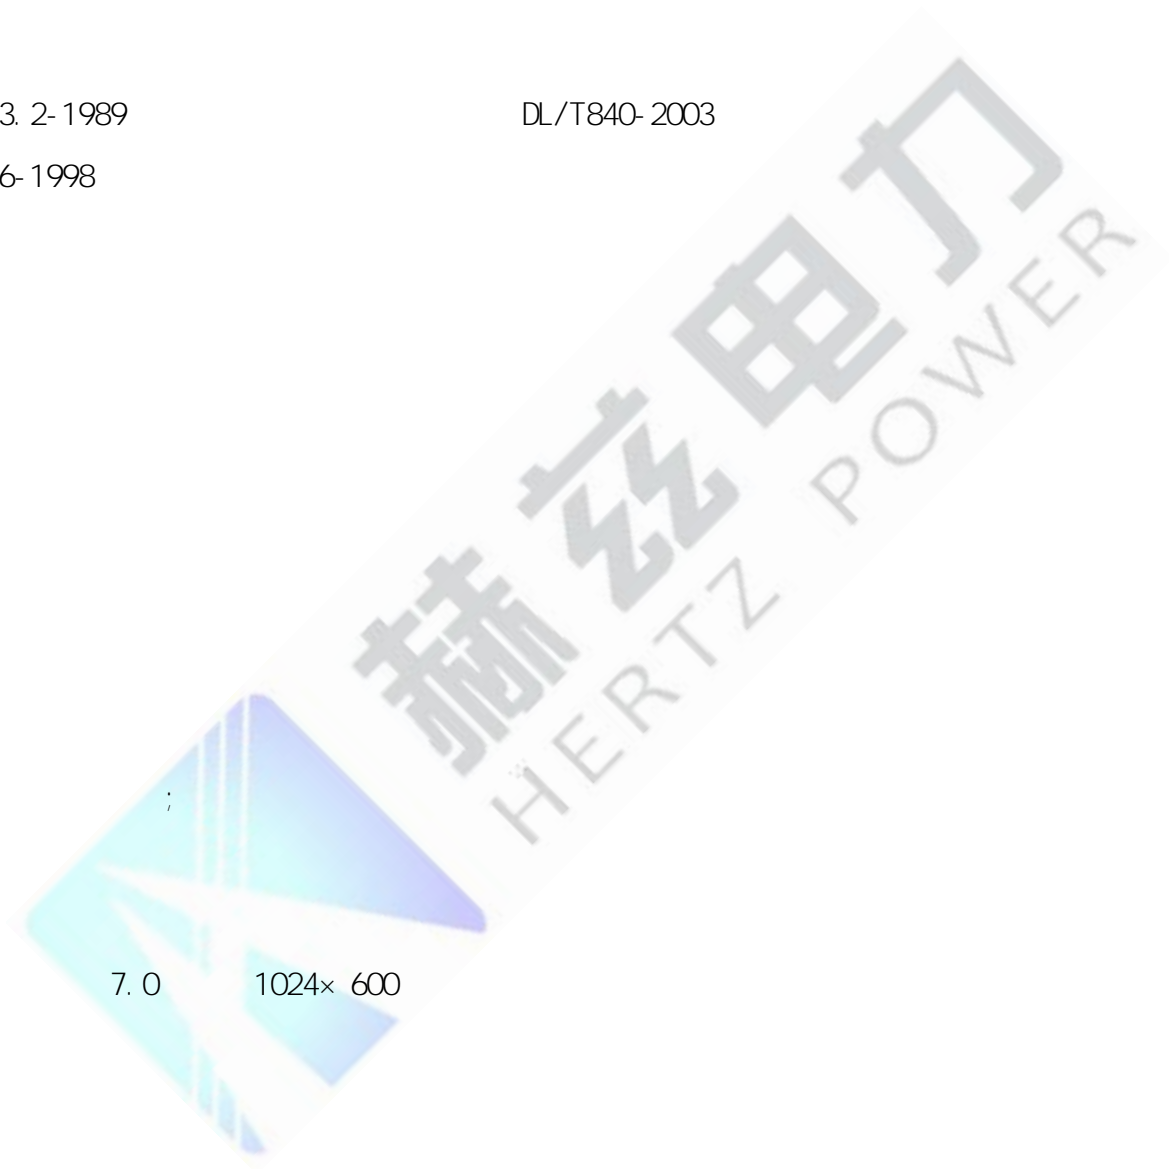

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

7.0 1024× 600

500

U


U

- 1
- 100V ± 10% 55Hz
 - 40V± 10% 55Hz
 - 8V± 10% 55Hz
 - 2V± 10% 55Hz

- 2
- : 0.1uF 6000uF ± 1%+0.01uF
 - : 50uH 20H ± (3%+0.05uH)
 - : 5mA 2A ± (3%+0.05mA)
 - : 20m 20k ± (3%+0.1m)

- 3 5
- 4 425*335*210 mm
- 5 8KG


-20 40
85%RH

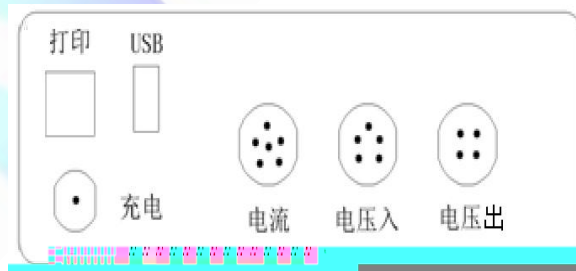



赫兹电力
HERTZ POWER

产品宗旨: 技术领先, 质量可靠, 轻便易用
服务宗旨: 快速响应, 客户满意, 超过期望

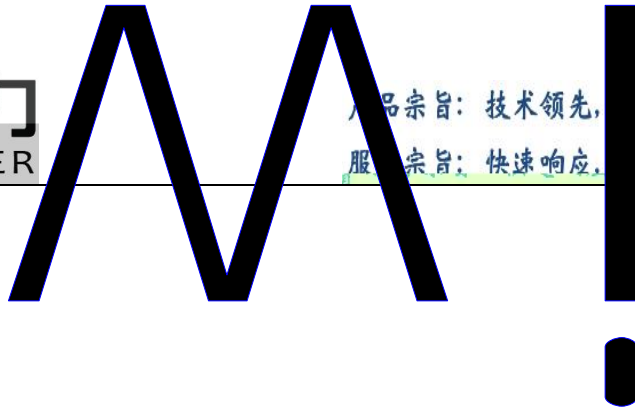




三相电容测试 联结方式：D 型

电压	7.122V	7.126V	7.128V
电流	130.5mA	130.9mA	130.7mA
测试频率	55.00Hz	55.00Hz	55.00Hz

测试

CT

2

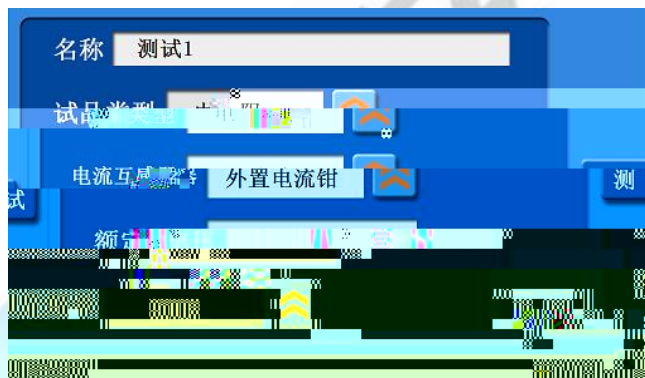

CT

单相电容测试

电压	4.160V	阻抗	620.6mΩ
电流	114.9mA	容抗	39.81Ω
测试频率	55.00Hz	电容	79.95μF

测试

3



名称：测试1 单相电容测试 外置电流钳
额定频率：50Hz 额定电压：10.000 kV

电压	4.160V	阻抗	620.6mΩ
电流	114.9mA	容抗	39.81Ω
测试频率	55.00Hz	电容	79.95uF
角度	269.0°	容量	2.512MVar

上一条
下一条
U盘存储
打印
返回

" U "

4

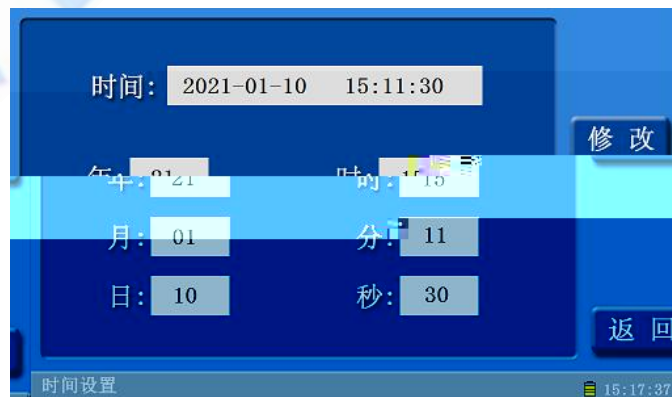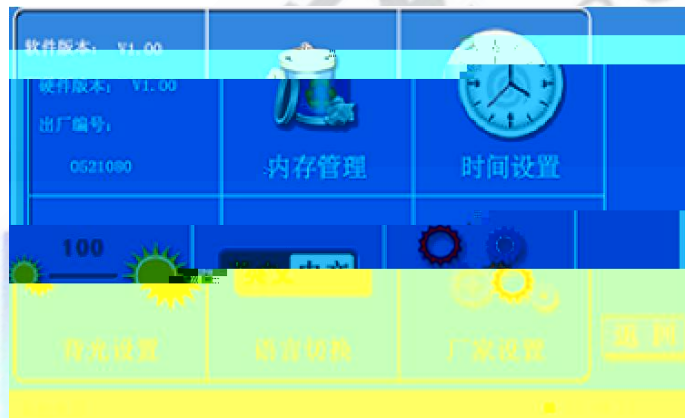


Y

Y

Yn

1

CT

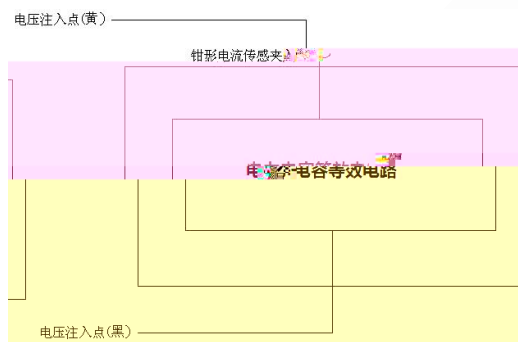


2

1 Y

CT

A, B, C

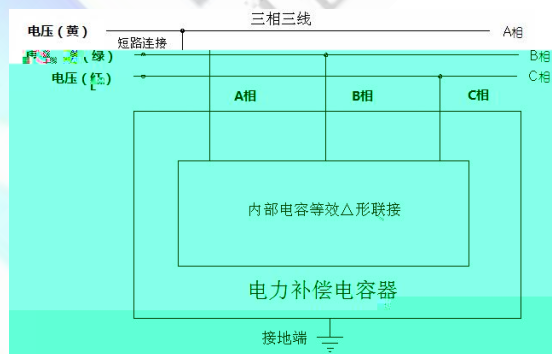

3

Yn

CT

A, B, C



赫兹电力
HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用
服务宗旨：快速响应，客户满意，长期合作





- 8.1
- 8.2
- 8.3
- 8.4
- 8.5
- 8.5
- 8.6
- 8.7



1
2

1.

2

1

2

3



24

027-83267669

i

