



赫兹电力
HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，送到满意，超过期







LCD

6

0 1000V, 250V 10kV, 0.01M Ω 1000G Ω
0 750V

	250V($\pm 10\%$)	0 10M Ω	$\pm 3\%rdg \pm 5dgt$	0.01M Ω
		10 100M Ω		0.1M Ω
		100 1000M Ω		1M Ω
		1G 10G Ω	$\pm 5\%rdg \pm 5dgt$	0.01G Ω
	500V($\pm 10\%$)	0 10M Ω	$\pm 3\%rdg \pm 5dgt$	0.01M Ω
		10 100M Ω		0.1M Ω
		100 1000M Ω		1M Ω
		1G 10G Ω	$\pm 5\%rdg \pm 5dgt$	0.01G Ω
	1000V($\pm 10\%$)	0 20M Ω	$\pm 3\%rdg \pm 5dgt$	0.01M Ω
		20 200M Ω		0.1M Ω
		200 2000M Ω		1M Ω
		2G 20G Ω	$\pm 5\%rdg \pm 5dgt$	0.01G Ω
	2500V($\pm 10\%$)	0 2000M Ω	$\pm 3\%rdg \pm 5dgt$	1M Ω
		2000M Ω 20G Ω	$\pm 5\%rdg \pm 5dgt$	0.01G Ω

225

027-83267669

	5000V(±10%)	20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		0 2000MΩ	±3%rdg ±5dgt	1MΩ
		2000MΩ 20GΩ	±5%rdg ±5dgt	0.01GΩ
		20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		200GΩ 1000GΩ	±20%rdg ±10dgt	1GΩ
	10kV(±10%)	0 2000MΩ	±3%rdg ±5dgt	1MΩ
		2000MΩ 20GΩ	±5%rdg ±5dgt	0.01GΩ
		20GΩ 200GΩ	±20%rdg ±10dgt	0.1GΩ
		200GΩ 1000GΩ	±20%rdg ±10dgt	1GΩ

1 TΩ Tera ohm =1000GΩ=10¹²Ω

1 GΩ Giga ohm =1000MΩ=10⁹Ω

1 MΩ Mega ohm =1000KΩ=10⁶Ω

	DC 0.0V 1000V	±1.5%rdg ±3dgt	0.1V
	AC 0.0V 750V	±1.5%rdg ±3dgt	0.1V

	23	± 5	75%rh				
(V)	250	500	1000	2500	5000V	10KV	
(V)	× 1 ± 10%						
GΩ	0.01MΩ 1000GΩ					: 0.01MΩ	
	0 1000V					: 0.1V	
	0 750V					: 0.1V	
	≥ 5mA(10KV)						





1. LCD
2. LINE
3. V
4. GUARD
5. EARTH
- 6.
7. USB
- 8.
- 9.
- 10.
- 11.
- 12.
- 13
- 14.
- 15.

1

LINE


GUARD

I


$R = V / I$

V

R



$$R = V / I$$

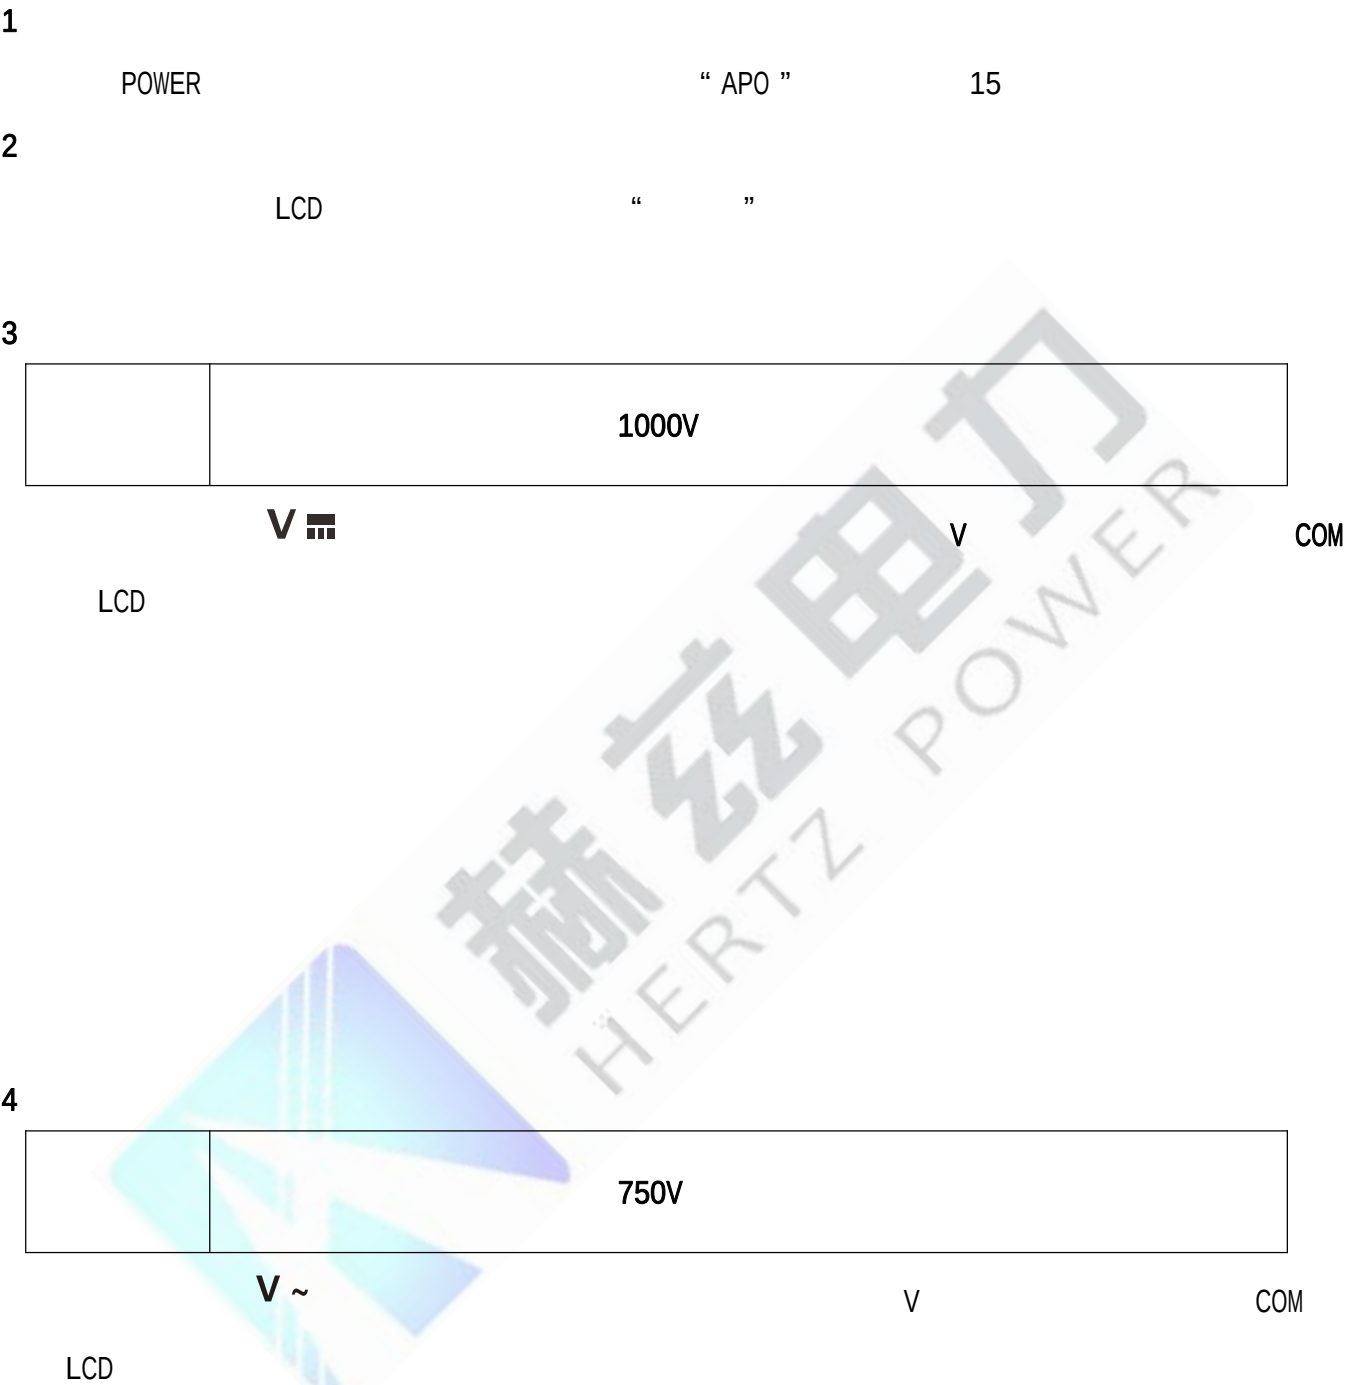



6 GUARD

7 PI (DAR)
7.1





“ ”

“ 60:15S ”

15S

“ ” “ ”

7.4

PI

DAR

()

() (1)

s K

Æ

“ ”

“ _ _ _ _ ”

600V

9999MΩ

10 /

“ MEM ”

“ FULL ”

1258MΩ

“ MEM ”

3

11 /

“ MR ”

“ MR ”

“ ▲ ”

“ ▼ ”

1

“ ”

“ ”

10

“ MR ”

3

6

LCD

“ NULL ”

“ CLEAR ”

NO

,

YES



宗旨：技术领先，质量可靠，轻便易用
宗旨：快速响应，客户满意，超过期望

12V

10V

“ ” ,


1

1

2 , 1



~



225

027-83267669

www.whhezi.com

15

whhezi@163.com



“

”

“

”

1

2

1.

2.



1

2

3

2

24

027-83267669

24

48

4